




Show-Zubehör & Sonstiges



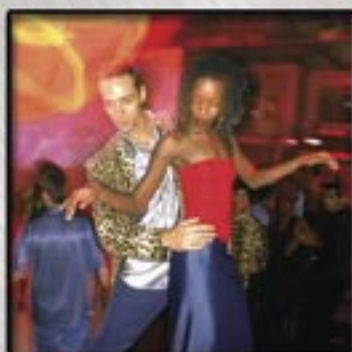

NEW PRODUCT



Showtec Roady Multimeter

ORDERCODE: **91001**

🇬🇧 The Showtec Roady Multimeter is the ideal tool which should be in each toolbox of each roady. This multimeter not only measures the basic values but also contains a dB meter, Lux-meter and thermometer.

🇩🇪 Der Showtec Roady-Multimeter ist ein ideales Werkzeug, das in keinem Werkzeugkasten eines Roadys fehlen sollte. Der Multimeter mißt nicht nur die Basiswerte sondern enthält auch dB-Messer, Lux-Messer und Thermometer.

Technical Information	
Auto range/manual range	
Data hold	
Auto power off	
Backlight	
DC voltage:	200m/2/20/200/1000V +/- 0,7%
AC voltage:	200m/2/20/200 +/- 0,8%, 750V +/- 1%
DC milli-voltage:	20m/200mV +/- 0,7%
AC milli-voltage:	20m/200mV +/- 0,7%
DC current:	200u, 2000u, 20m, 200mA +/- 1,2% 2/10A +/- 2,0%
AC current:	200u, 2000u, 20m, 200mA +/- 1,5% 2/10A +/- 3,0%
Resistance:	200/2k/20k/200k/2M/20MΩ +/- 1,0%
Temperature (thermocouple):	-20C – 1000C +/- 3%, 0F – 1800F +/- 3%
Temperature (NTC):	0 – 40C +/- 2C, 32F -104F +/- 4F
Humidity:	20% - 95%RH +/- 5%
Lux	2000 – 20000 Lux +/- 5%
Sound level:	60 – 120dB
Power:	1,5V (3x AAA)
Size:	195 x 92 x 55mm
Weight:	400gr

NEW PRODUCT



Showtec Digital Clamp Meter with LED Light

ORDERCODE: **91002**

🇬🇧 A digital clamp meter with multimeter function and a built in LED torch light and backlight for use in dark environments.


🇩🇪 Ein digitaler Clamp-Meter mit Multimeter-Funktion, eingebautem LED-Licht und beleuchteter Anzeige für den Einsatz in dunkler Umgebung.

Technical Information	
Auto/Manual range	
Back Light Function	
LED Torch light	
DCV 6/60/600V +/- 0,8%, 1000V +/- 1%	
ACV 6/60/600V +/- 1%, 700V +/- 1,2%	
ACA 600A +/- 2,5%, 1000A +/- 3%	
Resistance:	600/6k/60k/600k/6M Ω +/- 1%, 60M +/- 5%
Capacitance:	600n, 600u, 60u, 600u, 1000uF +/- 4%
Frequency:	40Hz to 100kHz +/- 0,1%
ADP Measurement:	600mV +/- 3%
Max diameter per conductor:	42mm
Power:	1,5V (3x AAA)
Dimensions:	225 x 86 x 33mm
Weight:	320g



Showtec Digital Luxmeter

ORDERCODE:
91003

 A compact luxmeter to measure the lightoutput or lightintensity. Including Transport Bag!


 Ein kompaktes Luxmeter, um den Licht-Output oder die Lichtintensität zu messen.

Technical Information	
Ranges:	0 – 2000 Lux +/- 5%, 2000 – 19990 Lux +/- 5%, 20000-50000 Lux +/- 5%
Photo detector:	one silicon photo diode with filter
Photo detector lead length:	150 cm
Photo detector size:	83x52x20,5mm
Power:	6F22 (9V) x1
Size:	125,5x72x27mm
Weight:	180g




Showtec Ultrasonic Distance Meter

ORDERCODE:
91005

 Want to make sure that your trussing is aligned?
Want to know the height of the venue?
Want to know the volume of the room?

No problem! Know it in a few moments with this Ultrasonic Distance Meter!

- Calculates area and volume
- Laser to target the point from where you want to measure
- Auto converts feet to meters
- Backlight

-  • Berechnet Raum und Volumen
- Laser zur Markierung des Punkts, von dem aus gemessen werden soll
 - "Auto" wandelt Maßeinheit Fuß in Meter um
 - Backlight














Technical Information	
Measurement range:	0,6 to 15m
Accuracy:	±0.5%±1Digit
Resolutions:	0,01m.
Aperture angle:	±5degrees
Power supply:	6F22(9V)x1
Dimensions:	136x59x38mm
Weight:	approx. 150g. (incl. battery)



The heavy duty multipole connectors for industrial purposes are used in electric and electronic machinery, control units, electric panels, control equipment and wherever connections are required for power and signalling circuits. (N.B. the connectors must not be handled live). The connectors are in conformance with the standard DIN VDE 0627 (European standard IEC 61984) and where applicable, to the standard DIN 43652 (European standard EN 175301-801 developed by CENELEC TC48B).


The connectors are suitable for use with alternate or direct current and facilitate the manufacture of sectional electric parts in complex machinery and installation and maintenance, in conformity with the European standard EN 60204-1. The connectors are designed for heavy duty industrial applications.



	Trumpetscrew	Cablehoods		
6 Pole	PG13.5 ORDERCODE 90706P For housing with 6 pins 	PG13.5 ORDERCODE 90701 Grey ORDERCODE 90701B Black 	6 Pole Cablehood Top Entry PG13.5 ORDERCODE 90727 Grey 	6 Pole Cablehood with Lockers Top Entry PG16 ORDERCODE 90732 Grey 
	10 Pole	PG16 ORDERCODE 90712P For housing with 10 pins 	10 Pole Cablehood Side Entry PG16 ORDERCODE 90707 Grey ORDERCODE 90707B Black 	10 Pole Cablehood Top Entry PG16 ORDERCODE 90728 Grey 
16 Pole		PG21 Trumpet Screw for 16 and 24 Pole ORDERCODE 90718P For housing with 16-24 pins 	16/22 Pole Cablehood Side Entry PG 21 ORDERCODE 90713 Grey ORDERCODE 90713B Black 	16/22 Pole Cablehood Top Entry PG 21 ORDERCODE 90725 Grey ORDERCODE 90725B Black 
	16 Pole	16/72 Pole Cablehood Top Entry PG 29 ORDERCODE 90742 Grey 	24 Pole Cablehood Side Entry PG21 ORDERCODE 90719 Grey 	24 Pole Cablehood Top Entry PG21 ORDERCODE 90730 Grey 


Protection Cap for 6 pole

ORDERCODE **90750**



Protection Cap for 10 pole

ORDERCODE **90749**




Protection Cap for 16-72 pole

ORDERCODE **90740**



Protection Cap for 24-108 pole

ORDERCODE **90741**



Inserts

Chassis

6 Pole Insert Male

ORDERCODE **90705**



6 Pole Insert Female

ORDERCODE **90704**



6 Pole Chassis Open Bottom with Clips

ORDERCODE **90703**

Grey



6 Pole Chassis Closed Bottom with Clips

ORDERCODE **90702**

Grey



10 Pole Insert Male

ORDERCODE **90711**

ORDERCODE **90711S** Screwless



10 Pole Insert Female

ORDERCODE **90710**

ORDERCODE **90710S** Screwless



10 Pole Chassis Open Bottom with Clips

ORDERCODE **90709**

Grey



10 Pole Chassis Closed Bottom with Clips


ORDERCODE **90708**

Grey



16 Pole Insert Male

ORDERCODE **90717**



16 Pole Insert Female

ORDERCODE **90716**



16/72 Pole Chassis Open Bottom with Clips

ORDERCODE **90715** Grey

ORDERCODE **90715B** Black



16/72 Pole Chassis Closed Bottom with Clips PG-21

ORDERCODE **90714** Grey

ORDERCODE **90714B** Black



24 Pole Insert Male

ORDERCODE **90723**



24 Pole Insert Female

ORDERCODE **90722**



24 Pole Chassis Open Bottom with Clips

ORDERCODE **90721**

Grey







24 Pole Chassis Closed Bottom with Clips

ORDERCODE **90720**

Grey



	Trumpetscrew	Cablehoods		Inserts
16/72 Pole	PG 29 Trumpet Screw for 16 and 24 Pole ORDERCODE 90724 Cable entry 32 mm 	Cablehood Side Entry PG 29 ORDERCODE 90744 Grey, 16/72 Pole 	Cablehood Top Entry PG 29 ORDERCODE 90748 Grey, 16/72 Pole, High-model 	Audio Insert Male ORDERCODE 90752 without Contactpins, 72 Pole 
	PG 29 Trumpet Screw for 16 and 24 Pole ORDERCODE 90724 Cable entry 32 mm 	Cablehood Side Entry PG 29 ORDERCODE 90745 Grey, 24/108 Pole 	Cablehood Top Entry PG 29 ORDERCODE 90743 Grey, 24/108 Pole 	Audio Pole Insert Male ORDERCODE 90754 without Contactpins, 108 

Showtec Bulgin Connectors

Showtec Bulgin Male connector

ORDERCODE **90404**

Ampere: 6A max.
Voltage: 230V



UK Flex mount male circular connector compliant with RoHS standard, screw terminals, 8 poles brass nickel plated 6A, 250V a.c. (per pin), operating temperature range -20 degree to +70 degree, moulding glass filled nylon black.

Showtec Bulgin Female connector

ORDERCODE **90408**

Ampere: 6A max.
Voltage: 230V



Showtec Bulgin Chassis Female

ORDERCODE **90407**

Ampere: 6A max.
Voltage: 250V AC (per pin)



Showtec Bulgin Chassis Male

ORDERCODE **90411**

Ampere: 6A max.
Voltage: 230V






Chassis

Audio Insert Female

ORDERCODE **90751**

without Contactpins, 72 Pole



Chassis Closed Bottom with Clips PG-29

ORDERCODE **90746**

Grey, 16/72 Pole



Audio Insert Female

ORDERCODE **90753**

without Contactpins, 108 Pole



Chassis Closed Bottom with Clips PG-29

ORDERCODE **90747**

Grey, 24/108 Pole



Audio Contactpin Silver-plated

ORDERCODE **90756** Male

ORDERCODE **90755** Female



Conductor entry: 0,14 - 0,3 mm
Conductor-stripping: 9 mm

Guide Pin

ORDERCODE **90757F** Female

ORDERCODE **90757M** Male



Insertion Tool

ORDERCODE **90763**



For insertion of the pin-contacts into the inserts.

Removal Tool Budget Version

ORDERCODE **90764B**



To remove the pin-contacts from the inserts.

Showtec 19-pin Socapex Connectors

Showtec Socapex 19 Pin male cable connector

ORDERCODE **90780**

19 pin male cable connector
25 A nominal current
aluminium alloy molded shell
gold plated copper alloy machined contacts



Showtec Socapex 19 Pin female cable connector

ORDERCODE **90781**

19 pin female cable connector
aluminium alloy molded shell
gold plated copper alloy machined contacts
25A nominal current



Showtec Socapex 19 Pin female chassis connector

ORDERCODE **90782**

19 pin female chassis connector
aluminium alloy molded shell
gold plated copper alloy machined contacts
25A nominal current



Showtec Socapex 19 Pin male chassis connector

ORDERCODE **90783**

19 pin male chassis connector
aluminium alloy molded shell
gold plated copper alloy machined contacts
25A nominal current



Showtec Socapex 19 Pin male cable connector PG29 IP67

ORDERCODE **90784**

19 pin male cable connector
PG29 waterproof IP67rated
metallic backshell, double insulation
65mm diameter, 140mm length
100% compatible with Socapex 419AR range



Showtec Socapex 19 Pin female cable connector PG29 IP67

ORDERCODE **90785**

19 pin female cable connector PG29
waterproof IP67rated, metallic backshell
built-in double insulation
65mm diameter, 140mm length
100% compatible with Socapex 419AR range



Showtec Rubber Connectors

Showtec Rubber Schuko Connector Male

ORDERCODE **90401**
 Ampere: 16A max
 Voltage: 230V



Showtec Rubber Schuko Connector Female

ORDERCODE **90402**
 Ampere: 16A max / 10A cont.
 Voltage: 230V



Showtec PVC Schuko Connector Male

ORDERCODE **90405**
 Ampere: 16A max / 10A cont.
 Voltage: 230V



Showtec PVC Schuko Connector Female

ORDERCODE **90406**
 Ampere: 16A max / 10A cont.
 Voltage: 230V



Showtec Chassis Connectors

Showtec Chassis connector with cover

ORDERCODE **90403**
 Ampere: 16A max / 10A cont.
 Voltage: 230V



Showtec Chassis connector without cover

ORDERCODE **90438**
 Ampere: 16A max / 10A cont.
 Voltage: 230V



Showtec Rubber Connector Female CEE 7/V

ORDERCODE **90409**
 Ampere: 16A max
 Voltage: 230V



Showtec Chassis connectors with cover CEE 7/V

ORDERCODE **90410**
 Ampere: 16A max
 Voltage: 230V



Neutrik Powercon Connectors

Neutrik Neutrik Chassis-input

ORDERCODE **90530**
 Ampere: 16A max / 10A cont.
 Voltage: 230V



Neutrik Neutrik Chassis-output

ORDERCODE **90531**
 Ampere: 16A max / 10A cont.
 Voltage: 230V



Neutrik Neutrik Connector-input

ORDERCODE **90532**
 Ampere: 16A max / 10A cont.
 Voltage: 230V



Neutrik Neutrik Connector-output

ORDERCODE **90533**
 Ampere: 16A max / 10A cont.
 Voltage: 230V





Showtec IEC Connectors

Showtec IEC Euro Male Connector

ORDERCODE **90434**

Ampere: 10A max. / 6A cont.
Voltage: 230V



Showtec IEC Euro Female Connector

ORDERCODE **90435**

Ampere: 10A max. / 6A cont.
Voltage: 230V



Showtec IEC Euro Male Chassis

ORDERCODE **90436**

Ampere: 10A max. / 6A cont.
Voltage: 230V



Showtec IEC Euro Female Chassis

ORDERCODE **90437**

Ampere: 10A max. / 6A cont.
Voltage: 230V



Showtec CEE Connectors 3 PIN

Showtec CEE Form 16A 3 Pin Cable Male

ORDERCODE **90301**

Ampere: 16A cont.
Voltage: 230V



Showtec CEE Form 16A 3 Pin Cable Female

ORDERCODE **90302**

Ampere: 16A cont.
Voltage: 230V



Showtec CEE Form 16A 3 Pin Wallmount Male

ORDERCODE **90303**

Ampere: 16A cont.
Voltage: 230V



Showtec CEE Form 16A 3 Pin Wallmount Female

ORDERCODE **90304**

Ampere: 16A cont.
Voltage: 230V



Showtec CEE Form 16A 3 Pin Socket Male

ORDERCODE **90323**


Ampere: 16A cont.
Voltage: 230V



Showtec CEE Form 3 Pin Socket Female

ORDERCODE **90319**


Ampere: 16A cont.
Voltage: 230V





Showtec UK Adapters

Showtec Schuko to UK plug adapter

ORDERCODE 90450	
------------------------	-----------------------------------------------------------------------------------

Showtec UK to Schuko plug adapter



ORDERCODE 90451	
------------------------	-----------------------------------------------------------------------------------

Showtec CEE Connectors 4 Pin



Showtec CEE Form 16A 4 Pin Cable Male

ORDERCODE 90317Y		
Ampere: 16A Voltage: 380V		



Showtec CEE Form 16A 5 Pin Socket Female

ORDERCODE 90320Y		
Ampere: 16A Voltage: 380V		

Showtec CEE Form 16A 4 Pin Cable Female

ORDERCODE 90318Y		
Ampere: 16A Voltage: 380V		

Showtec CEE Form 16A 5 Pin Socket Male

ORDERCODE 90324Y		
Ampere: 16A Voltage: 380V		





Connectors 16A 380V

Showtec CEE Form 16A 5 Pin Cable Male

ORDERCODE **90305**

Ampere: 16A
Voltage: 380V



Showtec CEE Form 16A 5 Pin Cable Female

ORDERCODE **90306**

Ampere: 16A
Voltage: 380V



Showtec CEE Form 16A 5 Pin Wallmount Male

ORDERCODE **90307**

Ampere: 16A
Voltage: 380V



Showtec CEE Form 16A 5 Pin Wallmount Female

ORDERCODE **90308**

Ampere: 16A
Voltage: 380V



Showtec CEE Form 16A 5 Pin Socket Male

ORDERCODE **90324**

Ampere: 16A
Voltage: 380V



Showtec CEE Form 16A 5 Pin Socket Female

ORDERCODE **90320**

Ampere: 16A
Voltage: 380V



Connectors 32A 380V

Showtec CEE Form 32A 5 Pin Cable Male

ORDERCODE **90309**

Ampere: 32A
Voltage: 380V



Showtec CEE Form 32A 5 Pin Cable Female

ORDERCODE **90310**

Ampere: 32A
Voltage: 380V



Showtec CEE Form 32A 5 Pin Wallmount Male

ORDERCODE **90311**

Ampere: 32A
Voltage: 380V



Showtec CEE Form 32A 5 Pin Wallmount Female

ORDERCODE **90312**

Ampere: 32A
Voltage: 380V



Showtec CEE Form 32A 5 Pin Socket Male

ORDERCODE **90325**

Ampere: 32A
Voltage: 380V



Showtec CEE Form 32A 5 Pin Socket Female

ORDERCODE **90321**

Ampere: 32A
Voltage: 380V





Connectors 63A 380V

Showtec CEE Form 63A 5 Pin Cable Male

ORDERCODE **90313**

Ampere: 63A
Voltage: 380V



Showtec CEE Form 63A 5 Pin Cable Female

ORDERCODE **90314**

Ampere: 63A
Voltage: 380V



Showtec CEE Form 63A 5 Pin Wallmount Male

ORDERCODE **90315**

Ampere: 63A
Voltage: 380V



Showtec CEE Form 63A 5 Pin Wallmount Female

ORDERCODE **90316**

Ampere: 63A
Voltage: 380V



Showtec CEE Form 63A 5 Pin Socket Male

ORDERCODE **90326**

Ampere: 63A
Voltage: 380V



Showtec CEE Form 63A 5 Pin Socket Female

ORDERCODE **90322**

Ampere: 63A
Voltage: 380V



Showtec CEE Connectors 4 Pin

Showtec CEE Form 16A 4 Pin Cable Male

ORDERCODE **90317**


Ampere: 16A
Voltage: 380V



Showtec CEE Form 16A 4 Pin Cable Female

ORDERCODE **90318**

Ampere: 16A
Voltage: 380V

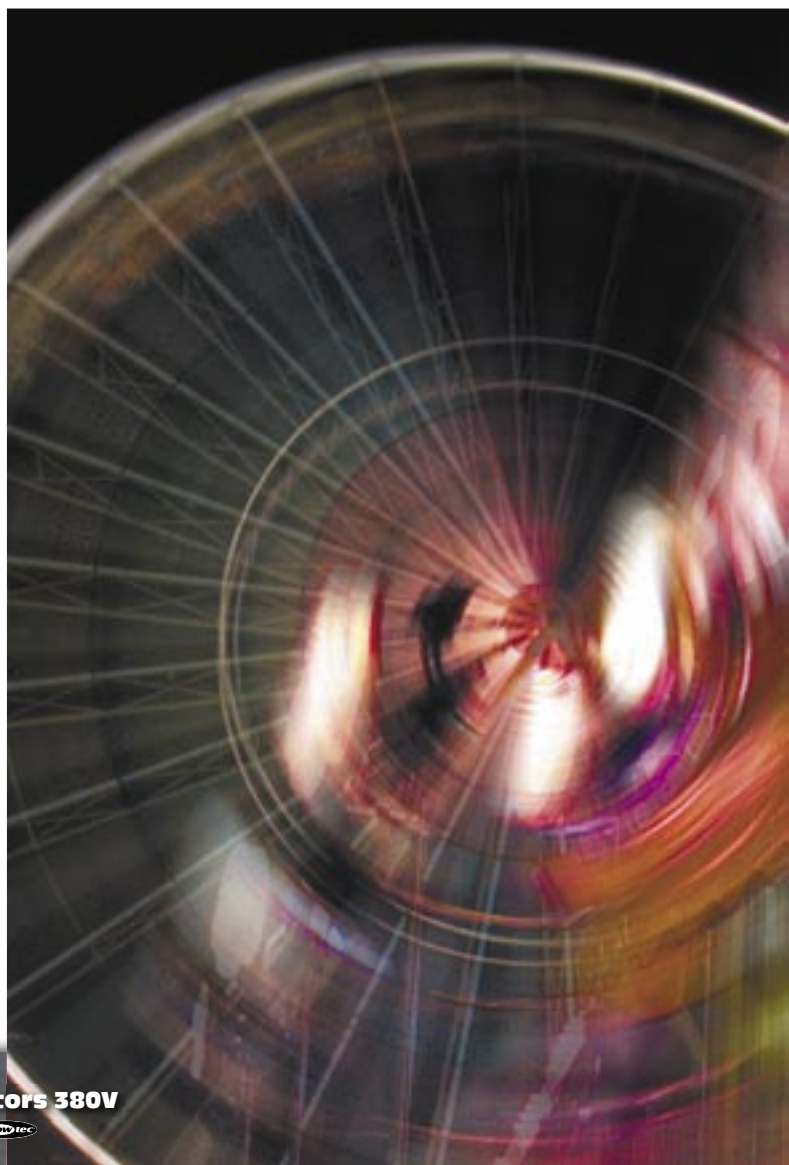

Showtec Schuko-Schuko Extension cable

LENGTH:	
5 meter / 3x1,5mm	ORDERCODE 90560
10 meter / 3x1,5mm	ORDERCODE 90561
15 meter / 3x1,5mm	ORDERCODE 90562
20 meter / 3x1,5mm	ORDERCODE 90563



Showtec Schuko/Schuko, 16A 230V Cable

LENGTH:	
5 meter / 3x 2,5mm2	ORDERCODE 90570
10 meter / 3x 2,5mm2	ORDERCODE 90571
15 meter / 3x 2,5mm2	ORDERCODE 90572
20 meter / 3x 2,5mm2	ORDERCODE 90573



Showtec Schuko > Powercon cable 230V

LENGTH:	
4 meter / 3x2,5mm2	ORDERCODE 90505
2 meter / 3x1,5mm2	ORDERCODE 90506



Showtec Extension Cable

LENGTH:	
3x16A 380V / 5x2,5mm2	ORDERCODE 90511
3x16A 380V / 5x2,05mm2	ORDERCODE 90512
3x16A 380V / 5x2,5mm2	ORDERCODE 90513



Showtec Extension Cable

LENGTH:	
3x32A 380V / 5x4mm2	ORDERCODE 90521
3x32A 380V / 5x4mm2	ORDERCODE 90522
3x32A 380V / 5x4mm2	ORDERCODE 90523



Showtec Extension Cable

LENGTH:	
3x63A 380V / 5x10mm2	ORDERCODE 90541
3x63A 380V / 5x10mm2	ORDERCODE 90542



Showtec Bulgin to Bulgin Cable

LENGTH:	
1,5 m	ORDERCODE 50261
3 m	ORDERCODE 50262
6 m	ORDERCODE 50263
10 m	ORDERCODE 50264
15 m	ORDERCODE 50265



Showtec Motorcable 20m

LENGTH:	
CEE 4P 16A Yellow	ORDERCODE 70299
CEE 4P 16A Red	ORDERCODE 70300



Showtec Power Multicable 6 Pole male-female

LENGTH:	ORDERCODE
10m, 6x1,5mm2	FP0110
15m, 6x1,5mm2	FP0115



Showtec Power Multicable 10 Pole male-female

LENGTH:	ORDERCODE
10m, 10x1,5mm2	FP0210
15m, 10x1,5mm2	FP0215



Showtec Power Multicable 16 Pole male-female

LENGTH:	ORDERCODE
5m, 16x1,5mm2	FP035
10m, 16x1,5mm2	FP0310
15m, 16x1,5mm2	FP0315
20m, 16x1,5mm2	FP0320
25m, 16x1,5mm2	FP0325



Showtec 240V Power Multicable

LENGTH:	ORDERCODE
7x1,5mm2	D9491
14x1,5mm2	D9492
18x1,5mm2	D9493



Showtec 240V Power Multicable

LENGTH:	ORDERCODE
14x2,5mm2	D9496
18x2,5mm2	D9497



Showtec Titanex Neopreen Cable

LENGTH:	ORDERCODE
100m. roll 3 x 1,5mm2	90201
100m. roll 3 x 2,5mm2	90202
minimal 1m. 5 x 2,5mm2	90203
minimal 1m. 5 x 4mm2	90233
minimal 1m. 5 x 6mm2	90234



Pirelli Pirelli Neopreen Cable

LENGTH:	ORDERCODE
3 x 2,5mm / 100 m spool	90237
3 x 1,5mm/ 100 m spool	90236
5 x 1,0mm/ p. mtr.	90235





Showtec Multisocket Schuko 4-way

LENGTH: IP-20
ORDERCODE 90460



Showtec Multisocket Schuko 5-way

LENGTH: IP-20
ORDERCODE 90461



4 Way Belgium Socketbox

Belgium/France socket > Ilme 6 pole

ORDERCODE 50252



4 Way Schuko Socketbox

Germany/ Dutch socket > Ilme 6 pole

ORDERCODE 50251



4 Way UK Socketbox

UK socket > Ilme 6 pole

ORDERCODE 50253



4 Way Belgium Socketbox

Belgium/France socket > Bulgin

ORDERCODE 50257



4 Way Schuko Socketbox

Schuko socket > Bulgin


ORDERCODE 50256



4 Way UK Socketbox

UK socket > Bulgin

ORDERCODE 50258

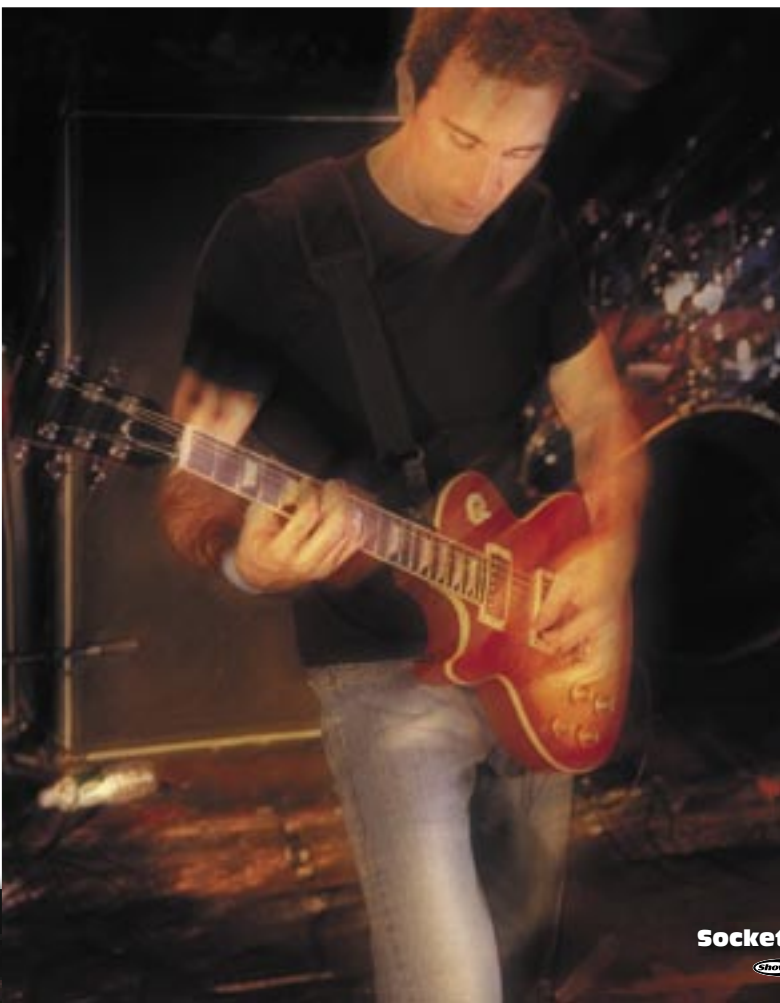

Showtec BO-6-PW

MODEL:
5 Pins 380V to 6 Schuko's ORDERCODE **50290**



16A 5 pins 380V to 6 Schuko's with phase indicators 3x16A

Showtec BO-6-S1

MODEL:
6 Schuko's and 1 x 16-pin connector ORDERCODE **50287**



Showtec BO-6-S2

MODEL:
6 Schuko's and 2 x 16-pin connector ORDERCODE **50288**



Showtec BO-6-PG

MODEL:
6-way with cable nut ORDERCODE **50289**



Showtec BO-8-S1

MODEL:
8 Schuko's and 1 x 16-pin connector ORDERCODE **50281**



Showtec BO-8-S2

MODEL:
8 Schuko's and 2 x 16-pin connector ORDERCODE **50282**



Showtec BO-8-E1

MODEL:
8 CEE-forms and 1 x 16-pin connector ORDERCODE **50283**



Showtec BO-8-E2

MODEL:
8 CEE-forms and 2 x 16-pin connector ORDERCODE **50284**





Showtec BreakoutBar 1

MODEL:

16p.-in > 6 Schuko

ORDERCODE **50291**



Showtec BreakoutBar 2

MODEL:

16p.-in > 6 Schuko

ORDERCODE **50292**



Showtec BreakoutBar 3

MODEL:

Splitter CEE 16A 5p. > Schuko

ORDERCODE **50293**



Showtec BreakoutBar 4

MODEL:

Splitter CEE 16A 5p. > Schuko + CEE 16A 5p.-out

ORDERCODE **50294**



Showtec BreakoutBar 5

MODEL:

Splitter CEE 16A 5p. > 6 CEE 16A 3p.

ORDERCODE **50295**



Showtec BreakoutBar 6

MODEL:

Splitter CEE 16A 5p. > 6 CEE 16A 3p. + 16A 5p. out

ORDERCODE **50296**



Showtec BreakoutBar 7

MODEL:

Splitter CEE 16A 5p. > 2x CEE 16A 5p.

ORDERCODE **50297**




Showtec BreakoutBar 8

MODEL:

Splitter CEE 32A 5p. > 2x CEE 32A 5p.

ORDERCODE **50298**

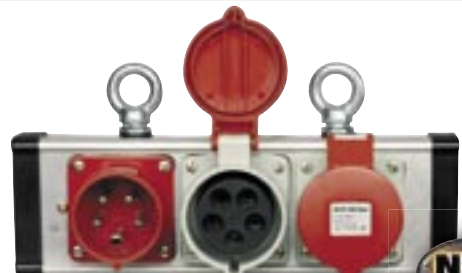

Showtec Breakout-box

MODEL:
4x CEE 4P 16A Yellow

ORDERCODE **70292**



Showtec Breakout-box

MODEL:
4x CEE 4P 16A Red

ORDERCODE **70297**



Showtec BS-4

MODEL:
4 Bulgins

ORDERCODE **50272**



Showtec BS-24

MODEL:
2 Bulgins and 4 IEC sockets

ORDERCODE **50273**



Showtec Bulgin-T-Bar



Available Models:

ORDERCODE **50274**

8 IEC sockets for max. 8 parcans.

Showtec Sliding Fourbar



Available Models:

ORDERCODE **70160**

150cm. 4x Schuko and 1x10 Ilme Multiconnector

ORDERCODE **70161**

150cm. 4x Schuko and 2x10 Ilme Multiconnector

Showtec Sliding Sixbar



Available Models:

ORDERCODE **70162**

200cm. 6x Schuko and 1x16 Ilme Multiconnector

ORDERCODE **70163**

200cm. 6x Schuko and 2x16 Ilme Multiconnector



Showtec PowerPanel 1
19" Panel for 12 pieces D-size with coding

ORDERCODE **51000**



Technical Information



- 19" rack mount / 1U
- 12 hole can be fit to Neutrik Powercon or Speakon socket (not included)
- Black epoxy-powder finish
- Fittings included
- 48 pieces of way marking stickers included

Showtec PowerPanel 2
19" Panel with 4 pieces Socapex and cabling left

ORDERCODE **51001**



Technical Information



- 19" rack mount / 2U
- 4 hole can be fit to Socapex (19-pin) socket
- 19 wiring cables of 2 meters, each attached a tag of conductor
- Black epoxy-powder finish
- Fittings included
- 8 pieces of way marking plate included.

Showtec PowerPanel 3
19" Panel with 4 pieces Socapex and cabling right

ORDERCODE **51002**



Technical Information



- 19" rack mount / 2U
- 4 hole can be fit to Socapex (19-pin) socket
- 19 wiring cables of 2 meters, each attached a tag of conductor
- Black epoxy-powder finish
- Fittings included
- 8 pieces of way marking plate included.

Showtec PowerPanel 4
19" Panel with 6 pieces CEE 3 pin 16A connector

ORDERCODE **51003**



Technical Information



- 19" rack mount / 2U
- 6 x CEE 16A 3-pin female socket
- Black epoxy powder finish
- 48 pieces of way marking plate included

Showtec PowerPanel 5
19" Panel with 6 pieces BS-13 connector

ORDERCODE **51004**



Technical Information



- 19" rack mount / 2U
- 6 x 13A 3-pin BS 1363 female socket
- Black epoxy-powder finish
- Fittings included
- 48 pieces of way marking plate included.

Showtec PowerPanel 6
19" Panel with 6 pieces BS-15 connector

ORDERCODE **51005**



Technical Information



- 19" rack mount / 2U
- 6 x 15A 3-pin BS 546 female socket
- Black epoxy powder finish
- Fittings included
- 48 pieces of way marking plate included.



Showtec Powerdistributor

Bring safety on stage!

With all rental companies in mind, Showtec developed together the Powerdistributors. See in one view the status of the 'voltage and amperage' during the show. The Powerdistributors are available in three versions (3x16A, 3x32A, and 3x63A).

Machen Sie Ihre Bühnen sicherer!

Showtec hat an alle Verleihfirmen gedacht und zusammen mit diesen Betrieben neue Powerdistributor entwickelt. So können Sie auf einen Blick Volt- und Amperezahl während der Show sehen. Die Powerdistributor sind in 3 Versionen lieferbar: 3x16A, 3x32A und 3x63A.



Showtec PSA-161 with ampère meter

ORDERCODE:
50602

Technical Information

Front:

- Digital voltage & amperage-monitoring per Phase.
- Input:CEE-socket, 3x16A
- Output: 1 piece 16A built-in Schuko socket
- 'C' automatic fuses per phase.

Back:

- Output: 6 pcs. 16A Schuko boxes (2pcs p. phase)

Showtec PSA-321 with ampère meter

ORDERCODE:
50612

Technical Information

Front:

- Digital voltage & amperage-monitoring per Phase.
- Residual current circuitbreaker FI 32A 4 pol. 0,03A
- 6x16A 'C' automatic fuses per phase.

Back:

- Input: 1,5m.(5 wires) cable with CEE-socket 3x32A
- Output: CEE 3x32A socket, 6pcs. 16A Schuko boxes. (2pcs p. phase)

Showtec PSA-631 with ampère meter

ORDERCODE:
50622

Technical Information

Front:

- Digital voltage & amperage-monitoring per Phase.
- Residual current circuitbreaker FI 63A 4 pol. 0,03A
- 4x32A 'C' automatic fuses.


Back:

- Input: 1,5m.(5 wires) cable with CEE-socket 3x63A
- Output: 4pcs. CEE 3x32A socket


Showtec PSA-3212S Powerdistributor

With Schuko outputs

ORDERCODE **50613**

 The Showtec PSA-3212-S distributes 3x 32Amps to 12 groups (3x4), with 12 automatic-fuses

At the front side are 3 Volt- and 3 Amp-meter, which shows voltage, and current, at the backside 12 Schuko-connectors (3 groups of 4 connectors), at which each group can load max 32 Amps totally (see drawing A). Furthermore there is a residential current circuit breaker and an extra Schuko-connector. The heavy-duty powder-coated metal-case is 19" x 4U and equipped with 1 meter cable and a 3x32A connector.

 Der Showtec PSA-3212S verteilt 3x32 Ampere auf 12 Kreise (3x4), die pro Kreis mit 16 Ampere C-Automaten abgesichert sind. An der Front sind 3 Volt- und 3 Ampere-Meter, auf denen Spannung und Strom kontinuierlich abgelesen werden können. Auf der Rückseite befinden sich 12 (3 Gruppen von jeweils 4 Stück) Schuko-Steckdosen, wobei jede einzelne Gruppe von 4 Stück mit max. 32 Ampere belastet werden darf (siehe Zeichnung). Außerdem sind an der Front noch ein Fehlerstrom-Automat und eine extra Schuko-Steckdose. Das robuste blau-eloxierte Stahlblechgehäuse ist 19"x4HE groß und mit einem Meter Kabel sowie einem montierten 3x32A Stecker ausgestattet.


Technical Information	
Dimensions (LxWxH):	48,2 (19") x 23 x 17,8cm (4HE)
Weight:	9,3 Kg




Showtec PSA-3212M Powerdistributor

With multiconnector outputs


ORDERCODE **50614**

 The Showtec PSA-3212-M distributes 3x 32Amps to 12 groups (3x4), with 12 automatic-fuses. At the front side are 3 Volt- and 3 Amps-meter, which show voltage and current, at the backside 2 multi-connectors and 6 Schuko-connectors (see drawing B). Furthermore there is a residential current circuit breaker and an extra Schuko-connector. The heavy-duty powder-coated metal-case is 19" x 4U and equipped with 1 meter cable and a 3x32A connector.

 Der Showtec PSA-3212-M verteilt 3x 32 Ampere auf 12 Kreise (3x4), die pro Kreis mit 16 Ampere C-Automaten abgesichert sind. Am Front sind 3 Volt- und 3 Ampere-Metern, womit Spannung und Strom kontinuierlich abgelesen werden kann. Auf der Rückseite sind 2 Multiconnectors und 6 Schuko-Steckdosen (Siehe Zeichnung B) Weiter ist am Front einen Fehlerstrom-Automaten und eine extra Schuko-Steckdose. Das robuste blau-pulverbeschichtetes Stahlblech-Gehäuse ist 19" x 4 HE x und mit 1 Meter Kabel und einen montierten 3x32A Stecker ausgestattet.

Maße (BxHxT): 48,2cm(19") x 17,8cm(4U / 4HE) x 25 cm
Gewicht: 10 Kg

Technical Information	
Dimensions (LxWxH):	48,2 (19") x 25 x 17,8cm (4U / 4HE)
Weight:	10 Kg

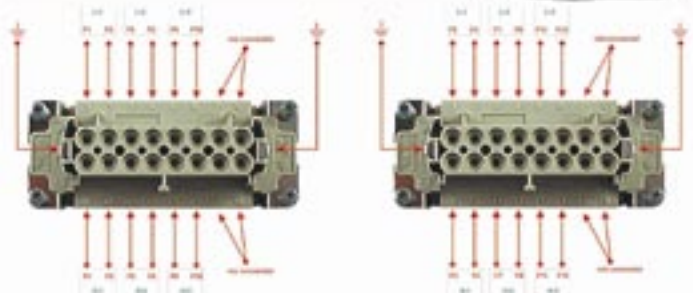



Showtec DMX Adapter

ORDERCODE **FLA30**

3p. XLR male > 5p. XLR female DMX Adapter



Showtec DMX Adapter

ORDERCODE **FLA29**

3p. XLR female > 5p. XLR male DMX adapter



Showtec Dig-Quad DMX Quad 4pole digital cable

Technical Information

ORDERCODE **D9471**

- Conductor drains Ø mm: OFC
- Conductor insulation: LDPE white+red+yellow+black
- Conductor insulation Ø in mm: 1,6
- Filler material: paper
- 1st shield: braided tinned copper 7x14x0,12
- 2nd shield: -
- Outer isolation: PVC matte black
- Outer isolation Ø in mm: 7

Conductor resistance: 130 Ω/Km
 Shield resistance: 12.5 Ω/Km
 Capacity Inner cond: 35pF/m
 Capacity Inner cond Shield: 52pF/m
 Working temperature min./max: -20~60 °C
 Working Voltage overflash: 30V
 Nom impedance: 110 Ω



Showtec FL08 DMX

LENGTH:	ORDERCODE
1,5m. Balanced XLR/M 5 pole > XLR/F 5 pole	FL08150
3m. Balanced XLR/M 5 pole > XLR/F 5 pole	FL083
6m. Balanced XLR/M 5 pole > XLR/F 5 pole	FL086
10m. Balanced XLR/M 5 pole > XLR/F 5 pole	FL0810
20m. Balanced XLR/M 5 pole > XLR/F 5 pole	FL0820



Showtec FL09 DMX

LENGTH:	ORDERCODE
1,5m. Balanced XLR/M 3 pole > XLR/F 3 pole	FL09150
3m. Balanced XLR/M 3 pole > XLR/F 3 pole	FL093
6m. Balanced XLR/M 3 pole > XLR/F 3 pole	FL096
10m. Balanced XLR/M 3 pole > XLR/F 3 pole	FL0910
15m. Balanced XLR/M 3 pole > XLR/F 3 pole	FL0915
20m. Balanced XLR/M 3 pole > XLR/F 3 pole	FL0920




Showtec Floor-Marking tape 50 mm

LENGTH:

Black-Yellow tape, 50 mm wide, 33 meter on spool

ORDERCODE **90623**

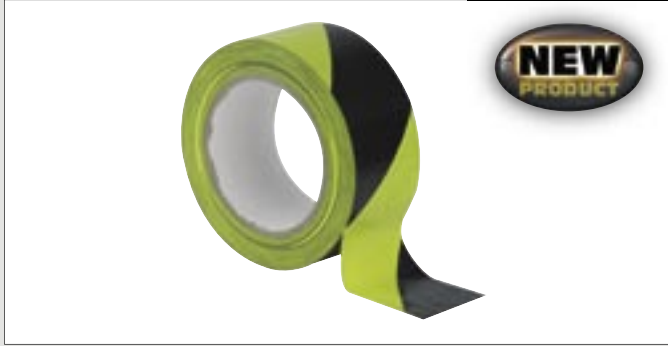

Gaffa Tape Theatre 50mm

LENGTH:

Grey, 50mm/50m (18pcs)

ORDERCODE **90606**

Black, 50mm/50m (18pcs)

ORDERCODE **90607**

White, 50mm/50m (18pcs)

ORDERCODE **90608**



Gaffa Tape Stage

LENGTH:

Stage quality, Grey. (18pcs)

ORDERCODE **90609**



Showtec Floor-Marking tape 150 mm

LENGTH:

Black -Yellow, 150 mm wide, 33 meter on spool

ORDERCODE **90622**



Gaffa Tape

LENGTH:

Grey, 50mm/50m (18pcs)

ORDERCODE **90610**

Black, 50mm/50m (18pcs)

ORDERCODE **90611**

White, 50mm/50m (18pcs)

ORDERCODE **90612**

LENGTH:

Grey, 38mm/50m (24pcs)

ORDERCODE **90613**

Black, 38mm/50m (24pcs)

ORDERCODE **90614**

White, 38mm/50m (24pcs)

ORDERCODE **90615**

White, 19mm/50m (24pcs)

ORDERCODE **90616**



Showtec Floor-Marking tape 50 mm

LENGTH:

Red-White safety-signaling tape, 50 mm wide, 33 meter on spool

ORDERCODE **90624**



Balletfloor Tape

LENGTH:

Black, 50mm/33m

ORDERCODE **90617**



Gaffa Tape 150 mm (X-tra wide)

LENGTH:

Black, heavy duty, 150 mm wide, 50m

ORDERCODE **90621**





Showtec X Stage
with water-resistance surface

ORDERCODE:
70541

🇬🇧 This platform is perfectly suited for basic stage applications. The light-weight aluminium profile combines with a rigid deck construction to create simple stage configurations. The stage is equipped with an outdoor water-resistant plywood deck.


🇩🇪 Diese Plattform ist perfekt geeignet für Basisanforderungen für die Bühne. Das leichte Aluminiumprofil kombiniert mit einer stabilen Deckenkonstruktion sorgt für einfache, gute Bühnenkonfigurationen. Die Bühne ist mit einer wasserabweisenden Sperrholz-Oberfläche, die für den Außenbereich geeignet ist, ausgestattet.

Technical Information	
Dimensions:	200x100 cm. (LxW)
Maximum height:	140 cm.
Maximum load:	750kg./m2
Top:	15mm. plywood
Weight:	35 Kg.
Storage height:	10cm.
Platform material:	Aluminium


Showtec X Stage Standard Leg

- ORDERCODE **70560** Aluminium, 20cm.
- ORDERCODE **70561** Aluminium, 40cm.
- ORDERCODE **70562** Aluminium, 60cm.
- ORDERCODE **70563** Aluminium, 80cm.
- ORDERCODE **70564** Aluminium, 100cm.

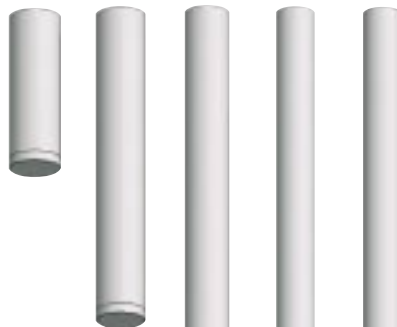

Showtec X Stage Telescopic Leg

- ORDERCODE **70565** 50-70cm.
- ORDERCODE **70566** 70-100cm.
- ORDERCODE **70567** 100-150cm.






Showtec X Stage Adjustable Stairs 60-100cm.

ORDERCODE: **70538**

🇬🇧 A wide range of X-Stage accessories is available to create catwalks, stages and raised seating areas. These adjustable stairs can be connected to any X-Stage deck. The hand-rails are compliant with DIN4112 TN44.5 standards and can be fitted easily to both types of stages. The adjustable stairs have a working height of 600mm to 1000mm, they are 1000mm wide and can be connected to any Stage deck.

🇩🇪 Eine breite Anzahl von X-Stage-Zubehör ist zum Aufbau von Catwalks, Bühnen und höher angelegten Sitzbereichen erhältlich. Diese verstellbare Treppe kann an jedes X-Stage-Deck montiert werden. Die Geländer entsprechen DIN4112 TN44.5 Standards und können an beide Bühnentypen angepaßt werden. Die verstellbaren Treppen besitzen eine Arbeitshöhe von 600mm bis 1000mm, sie sind 1000mm breit und können an jede Bühne angepaßt werden.

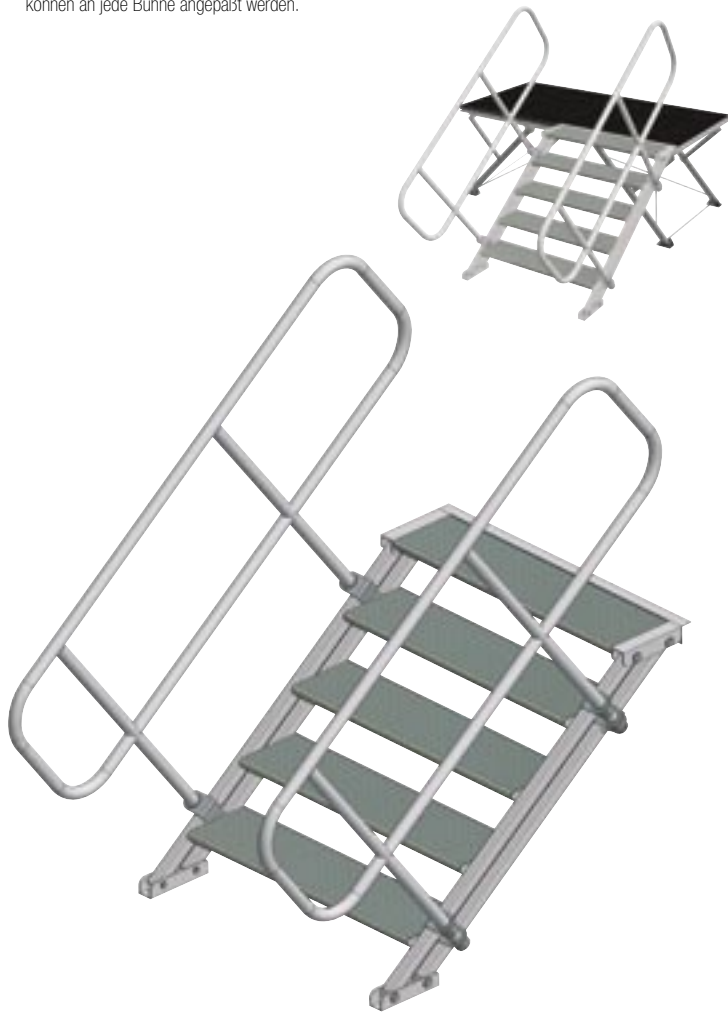

Showtec X Stage Guard rail

🇬🇧 The X Stage guard rail (aluminium, 40mm. tube) protects anybody from falling of the stage. This guard rail is necessary for all stages with a height more than 50cm, according to the safety regulations.


🇩🇪 Das X-Stage Geländer (Aluminium, 40mm Rohr) verhindert, dass jemand von der Bühne stürzt und sich ev. verletzt. Laut Sicherheitsbestimmungen ist dieses Geländer für alle Bühnen, die höher als 50cm sind, Vorschrift.



Available models:

ORDERCODE **70534** Length 100cm.

ORDERCODE **70535** Length 200cm.

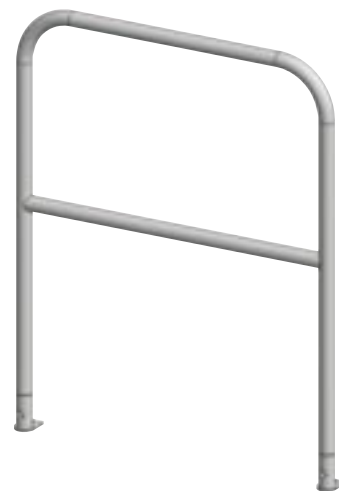


Showtec XStage Chair- stop protection Length 100cm.

ORDERCODE **70536**



Showtec X Stage Quick Connector


ORDERCODE **70530**



Showtec X Stage Connector

ORDERCODE **70539** for 2 legs

ORDERCODE **70540** for 4 legs

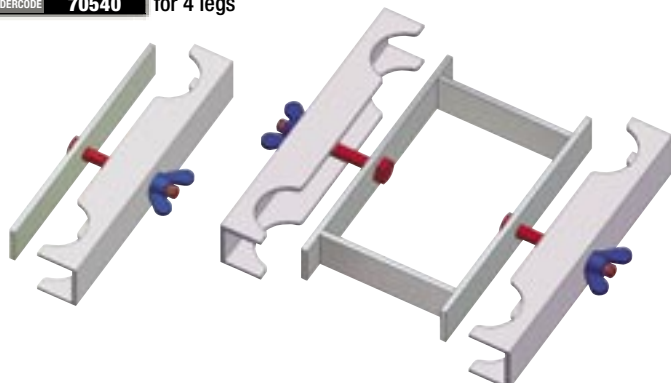

Showtec X Stage Transport cart

ORDERCODE **70537**

